

# 10/100UTP Tap / Rack Mount model



## Features

- No point of failure
- Link/Activity LEDs
- Invisible to the network
- Redundant Powered
- 3 years warranty

## Order Number

C1R-100

The 100UTP Tap avoids downtime in your 10BaseT/100BaseTX network. Once in place it enables you to monitor half/full duplex communication and move test equipment without breaking the circuit.

The Link/Activity LEDs confirm instantly that your Tap is wired up correctly. To visualize PoE is an absolute must today. The Tap ports are galvanic separated from the network and protecting your analyzer from PoE and Ground Potential Difference.

It is none-intrusive for 100% security. Unlike SPAN ports it monitors in real-time, all 7 protocol layers and any package size including errors. The Tap is invisible to the network and does not interfere in auto negotiation/speed or duplex settings.

The Permanent Network Link feature guarantees permanent network connectivity even when power fails. No packages are lost at power failure. It is Redundant powered for maximum monitoring uptime.

## Included accessories :



Small Power Supply

## Optional accessories :




19" Rack Plate 1U (ARP1U-1M)



Filling Plate (AFP1U)



DC Chain Cord

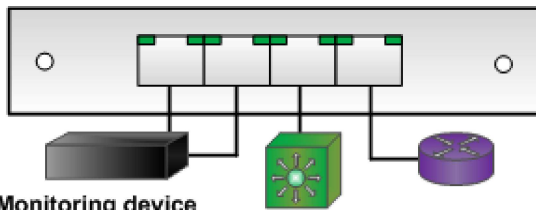

Monitoring device

Front view



Back view

Rigid metal enclosure, structured black oven painted.  
Powered by external adapter: 90-240VAC / 12V-500mA.  
Power consumption for one unit : 12V-80mA.  
LEDs : Two (2) Link/Activity, Two (2) PoE, Two (2) Power  
Connectors : Four (4) RJ45, 8 pin, gold plated. .  
Dimension (WxDxH) : 11.3 x8.8 x 3cm  
Front panel dimension (WxH) : 14.2 x 3cm  
Weight : 240 gr.  
Operating Temperature : 0°C to 55°C  
Storage Temperature : -10°C to 90°C  
Humidity : 10 to 90%, non-condensing